

## LTE05E SERIES

### 5W DESKTOP AC ADAPTOR

#### INPUT&OUTPUT SPECIFICATION:

Input Voltage: AC 100Vac ~ 240 Vac 50/60Hz

Output Power : From 3.3W ~ 6W

Output Voltage : 3.3V / 5.0V / 9.0V / 12V / 15V / 24V

Voltage Regulation: +/- 5.0%

#### GENERAL SPECIFICATION:

Operating Temperature: 0~40°C

Operating Relative Humidity: 5~95% RH

Storage Temperature: -40 ~ 85 °C

Over Current Protection: 120%~220% of Rated Load

Over Voltage Protection: Auto Recovery

Short Protection: Auto Recovery

Withstanding Voltage: 300Vac (Class2)

Insulation Resistance:100MOhm min @ DC 500V

Leakage Current: 0.25mA Max (Class2)

EMI: FCC & CISPR22 CLASS B

EMS: EN 61000-4-2, -3, -4, -5, -6, -11

Efficiency: Meet CEC LEVEL 4

LTE05W-S0 60% Min @ 115Vac and Rated Load

LTE05W-S1 68% Min @ 115Vac and Rated Load


LTE05W-SY, S2, S3, S4 70% Min at 115Vac

No Load Standby Power: 0.5W Max @ 230Vac

#### DIMENSION (W x L x H mm)

84 x 45 x 28 mm

Length of DC Cable: 1.8M or by Request

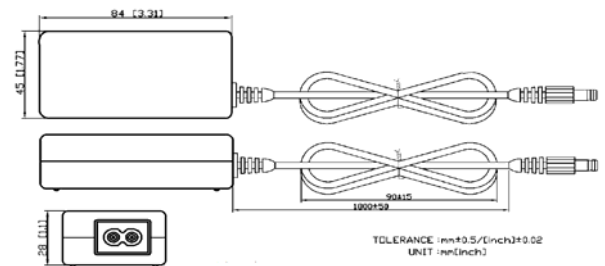

#### LTE05E MODEL LIST

MODEL	VOLTAGE	CURRENT
LTE05E-S0	3.3V	1.0A
LTE05E-S1	5.0V	1.0A
LTE05E-SY	9.0V	0.5A
LTE05E-S2	12V	0.5A
LTE05E-S3	15V	0.33A
LTE05E-S4	24V	0.2A



SAFETY STANDARD & QUALITY APPROVALS

LTE Li Tone Electronics Co., Ltd NO.29, Lane 311, Sec 1, Jie Sou Rd, Sanhsia, Taipei, Taiwan

Service@lte.com.tw <http://www.lte.com.tw> Tel: + 886-2-267833-2512 Fax: +886-2-28671-3701

Specifications subject to change without notice