

## LTE05W SERIES SWITCHING AC ADAPTOR

### INPUT&OUTPUT SPECIFICATION:

Input Voltage: AC 100Vac ~ 240 Vac 50/60Hz

Output Power : From 3.3W ~ 6W

Output Voltage : 3.3V / 5.0V / 9.0V / 12V / 15V / 24V

Voltage Regulation: +/- 5.0%

### GENERAL SPECIFICATION:

Operating Temperature: 0~40

Operating Relative Humidity: 5~95% RH

Storage Temperature: -40 ~ 85

Over Current Protection: 120%~250% of rated load

Over Voltage Protection: Auto Recovery

Short Protection: Auto Recovery

Withstanding Voltage:

1500Vac (Class1) / 300Vac (Class2)

Insulation Resistance:100MOhm min @ DC 500V

Leakage Current:

0.75mA Max (Class1)

0.25mA Max (Class2)

EMI: FCC & CISPR22 CLASS B

EMS: EN 61000-4-2, -3, -4, -5, -6, -11

Efficiency: Meet CEC LEVEL 4

LTE05W-S0 60% Min @ 115Vac and Rated Load

LTE05W-S1 68% Min @ 115Vac and Rated Load

LTE05W-SY, S2, S3, S4 70% Min at 115Vac

No Load Standby Power: 0.5W Max @ 230Vac


### DIMENSION (W x L x H mm)

US Plug: 50 x 34.8 x 25 mm

EU Plug: 56.5 x 37.5 x 45.2 mm

UK Plug: 56.5 x 51 x 34.8 mm

AU Plug: 56.5 x 37.5 x 35 mm

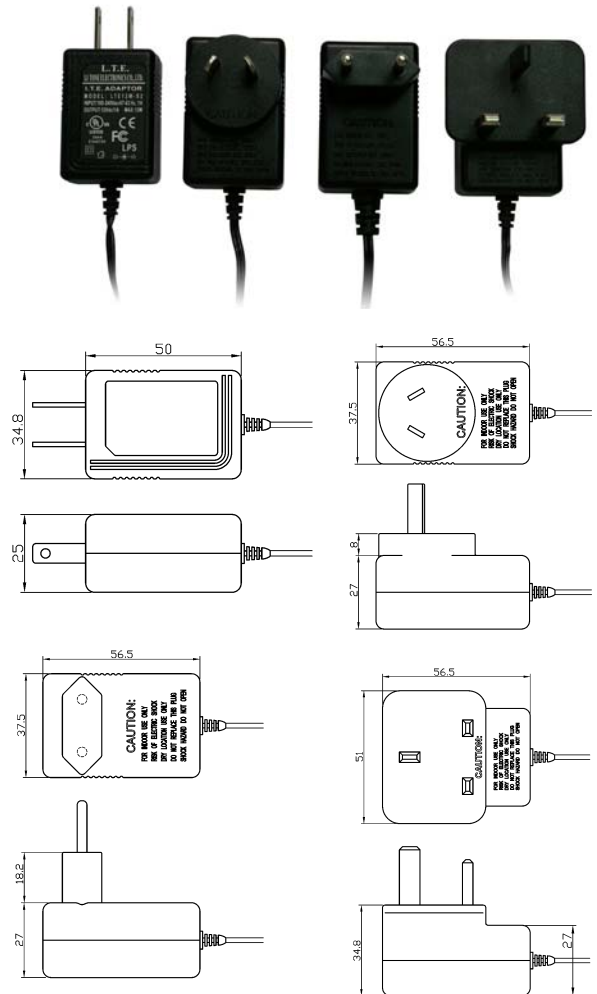

LTE05W MODEL LIST		
MODEL NO.	VOLTAGE	CURRENT
LTE05W-S0	3.3V	1.0A
LTE05W-S1	5.0V	1.0A
LTE05W-SY	9.0V	0.5A
LTE05W-S2	12V	0.5A
LTE05W-S3	15V	0.33A
LTE05W-S4	24V	0.2A

Safety Approvals and Standards:

