

LTE24E SERIES

24W DESKTOP AC ADAPTOR

INPUT&OUTPUT SPECIFICATION:

Input Voltage: AC 100Vac ~ 240 Vac 50/60Hz

Output Power : 24W

Output Voltage : 5.0V / 12V / 15V / 24V / 48V

Voltage Regulation: 3.0% ~ 6% by Model

GENERAL SPECIFICATION:

Operating Temperature: 0~40°C

Operating Relative Humidity: 5~95% RH

Storage Temperature: -40 ~ 85 °C

Over Current Protection:

Auto Recovery at 120%~200% of Rated Load

Over Voltage Protection: Auto Recovery

Short Protection: Auto Recovery

Withstanding Voltage:

1500Vac (Class I) & 300Vac (Class II)

Insulation Resistance:100MOhm min @ DC 500V

Leakage Current:

0.75mA Max (Class I) 0.25mA Max(Class II)

EMI: FCC & CISPR22 CLASS B

EMS: EN 61000-4-2, -3, -4, -5, -6, -11

Efficiency: Meet **CEC LEVEL IV**

75% ~ 80% (by model) Min@ 115Vac and Rated Load

75% ~ 80% (by model) Min @ 230Vac and Rated Load

No Load Standby Power: 0.5W Max @ 230Vac


DIMENSION (W x L x H mm)

98.4 x 45 X 31.4 mm

AC INLET TYPE: IEC 320 C6 / C8 / C14 (OPTIONAL)



Mechanical Drawing:

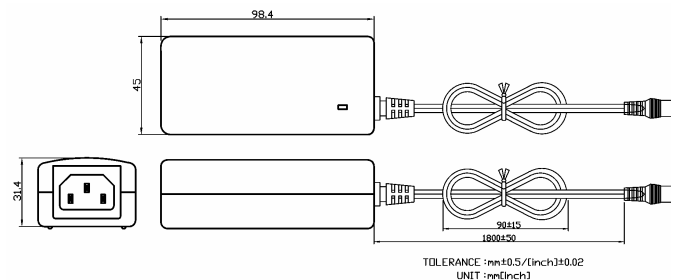

LTE24E MODEL LIST

MODEL	VOLTAGE	CURRENT
LTE24E-S1	5.0V	4.0A
LTE24E-S2	12V	2.0A
LTE24E-S3	15V	1.6A
LTE24E-S4	24V	1.0A
LTE24E-S5	48V	0.5A

SAFETY STANDARD & QUALITY APPROVALS:

