

LTE72E DUAL OUTPUT SERIES 72W DESKTOP AC ADAPTOR

INPUT&OUTPUT SPECIFICATION:

Input Voltage: AC 100Vac ~ 240 Vac
50/60Hz

Output Power : 72W

Output Voltage : Dual Output with 12V and
5V

Voltage Regulation: +/- 5%

GENERAL SPECIFICATION:

Operating Temperature: 0~40

Operating Relative Humidity: 5~95% RH

Storage Temperature: -40 ~ 85

Over Current Protection:

V1&V2 Auto Recovery at 120%~200% of
Rated Load

Over Voltage Protection: Auto Recovery

Short Protection: Latch Off V1 &

Auto-Recovery V2

Withstanding Voltage:

1500Vac (Class I) & 300Vac (Class II)

Insulation Resistance:100MOhm min @ DC
500V

Leakage Current:

0.75mA Max (Class I) 0.25mA Max(Class II)

EMI: FCC & CISPR22 CLASS B

EMS: EN 61000-4-2, 4-3, 4-4, 4-5, 4-6, 4-7, 4-8

DIMEN

148 x

AC IN

(OPTIC




LTE72E MODEL		
MODEL	VOLTAGE	CURRENT
LTE72E	5V	7.0A
	12V	3.0A

SAFETY STANDARD & QUALITY
APPROVALS:



All Safety Approvals Pending

Mechanical Drawing:

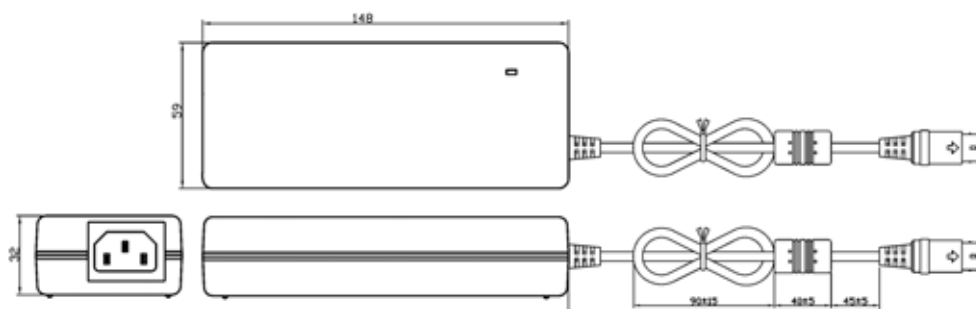

laiwan